


# NS-870-30

## 龍門式油壓裁斷機

## Traveling Head Hydraulic Cutting Press

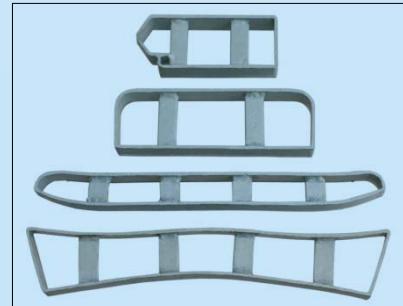

選購件：各種裁斷刀具  
Optional Parts: various die cutters

- 適用於皮革、塑膠、帆布、尼龍、紙板、木材、複合材料、包裝及各種合成材料一層或多層的成型裁斷
- 雙油缸，精密四柱自動平衡連桿結構，確保每個截斷點受力相同，保證了每一個截斷位置截斷深度完全一致
- 裁斷板下壓接觸刀模時自動慢切，使裁斷料最上層與最下層沒有尺寸誤差
- 特有設計構造，配合刀模及裁斷高度，使沖程調整簡單、準確；附微調保護裝置，靈活調設裁斷高度及力度，延長裁刀及膠板使用壽命
- 中央自動潤滑系統確保機器精度及提高機器耐用度
- 沖頭可左右移動，操作視線極佳，方便操作

### 選購件：

各種裁斷刀具

- Suitable for cutting various materials with one layer or multi-layers, including leather, plastic, canvas, nylon, cardboard, wood, compound materials, packing and other synthetic materials.
- Dual oil tank, precise four-pole automatic balance linking structure, ensures each cutting point getting even force and keeps the same cutting depth on each cutting place.
- When cutting board is pressed down to contact the cutter, it will cut slowly and automatically, thus will avoid tolerance between the highest and lowest layer of cutting materials.
- Specific designed structure for matching with cutter and cutting height makes stroke adjustment easy and precise; the equipped fine-adjustment protection device to adjust the cutting depth and force, and prolong the usage life of cutter and rubber board.
- Central automatic lubricating system ensures precision of the machine and improves its durability.
- Stroke head could move right and left, good operational view for convenient operation

### Optional Parts:

various die cutters

型號 Model	電源 Power Supply	馬達功率(kw) Power of Motor	裁斷壓力(tons) Cutting Force	裁斷面積(mm) Cutting Area	最大沖程(mm) Max. Stroke	淨重(kg) Net. Weight	機身尺寸(mm) Dimension Size
NS-870-30	3PH/380V/50Hz	4+0.55	30	610x610	165	3200	2330x1130x1880



藝誠(余氏)發展有限公司  
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下

G/F., 52 Wing Hong St.,  
Cheung Sha Wan, Kln., Hong Kong.

Tel :(852)2741 9981, 2742 0078 E-MAIL:info@ngaishing.com  
Fax:(852)2785 3149 Http://www.ngaishing.com